

Multi-channel communications transceiver and method

Publication number: TW238628B

Publication date: 2005-08-21

Inventor: RAGHAVAN SREEN A (US); MANICKAM
THULASINATH G (IN); SALLAWAY PETER J (CA);
TAYLOR GERARD E (US)

Applicant: MYRICA NETWORKS INC (US)

Classification:

- international: H04L27/26; H04L27/26; (IPC1-7): H04L29/00

- European: H04L27/26M

Application number: TW20020115102 20020708

Priority number(s): US20010904432 20010711; US20010965242 20010926;
US20020071771 20020206; US20020167158 20020610

Also published as:


WO03007564 (A3)
WO03007564 (A2)
EP1407572 (A3)
EP1407572 (A2)
US2003134607 (A1)

[more >>](#)

Report a data error here

Abstract of TW238628B

A transceiver system according to the present invention transmits data utilizing multiple frequency-separated channels is presented. In some embodiments, the baseband and one or more frequency separated transmission bands can be utilized. Any combination of modulation systems can be utilized (e.g. PAM for the baseband and QAM for the frequency separated bands). A transceiver circuit or chip according to the present invention includes a transmitter and a receiver and communicates with a corresponding transceiver chip. In some embodiments, one baseband PAM transmitter is combined with one frequency separated QAM transmitter. Embodiments of the invention can include cross-channel correction and intersymbol correction.

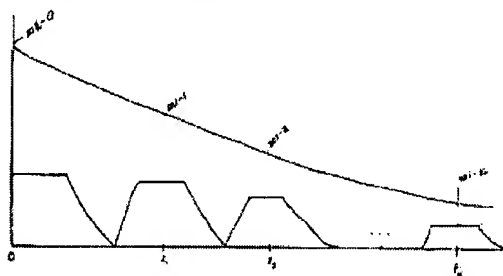

Data supplied from the **esp@cenet** database - Worldwide